


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 35 TOWNSHIP 15 RANGE 3
DATE: 10-04-07
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: 1/8" rebar fd.
METHOD OF ESTABLISHMENT: County: 10-5-99

IN. S.P.C. E ZONE NAD '83
NAME: 15033504
N: 494348.1355(m)
E: 56204.7238(m)

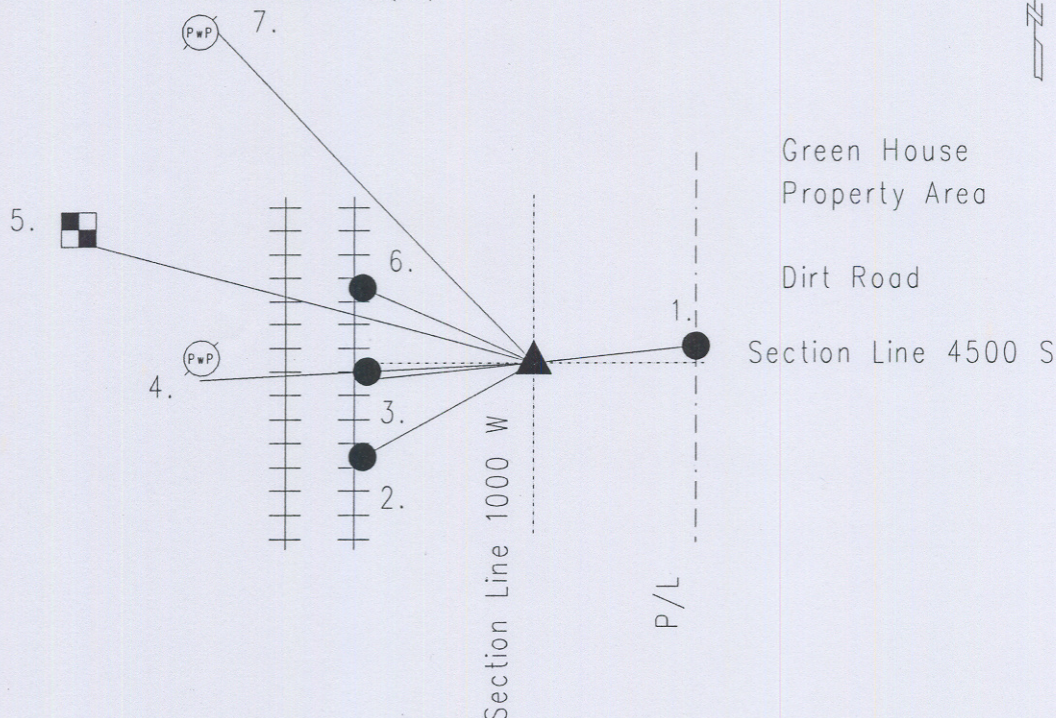

Original post set 1820 by Wm. B. Laughlin with witness: 4" ash N 40 W 12 links; 18" hickory S 5 W 23 links per Marion County Atlas pg.6. H.B. Fatout 3-8-1876 called for stone per Perry Township Legal Survey Book pg. 15. 11-6-75 called for square stone with cut 'x' found, per I.C.C. Railroad plans. Excavated 7-29-87 and stone found at surface and Harrison set. Re-tied 10-5-99 by Kiste. Re-tied 10-04-07 by Wilcoxen. Harrison destroyed by new construction.

15033504

REF.	DISTANCE	DESCRIPTION
1.	29.50'	A.S.A. capped rebar fd
2.	16.02'	Mag nail w/washers in railroad ties
3.	6.10'	Mag nail w/washer in railroad tie
4.	39.97'	Mag nail w/MCSO washert S PwP#111-663B 18"up
5.	123.00'	Fd. Cut 'x' SF bolt SF leg high tension tower
6.	17.25'	Mag nail w/washer in railroad tie
7.	116.46'	Fd mag nail w/bw F PwP#110-693 B 24"up